



Fully cleared working area with fixed table



Class 1 safety enclosure with inspection windows



Loading/unloading tables with dual pallet



Main technical features:	
Available standard models	1530 - 2030
Work area for available standard models (mm)	1500 x 3080 - 2060 x 3080
Models available on demand	1215 - 1520
Work area for models available on demand (mm)	1250 x 1550 - 1500 x 2050
Fiber Laser sources available power (W)	1000 / 2000
Repeatability with fixed table (mm)	< 0.05
Acceleration (programmable) (m/s ²)	up to 20
Axes X-Y-Z resolution (mm)	0.001
Accuracy (mm)	+/- 0.05
Input data formats	DXF (AutoCAD™), PLT (hppl standard), EPS, AI, PDF
Software interface	CAM Icaro on Windows™ platform
Norm compliance	2006/95/CE Low Voltage Directive 2006/42/CE Machinery Directive 2004/108/CE Electromagnetic Compatibility Directive CEI EN 60825-1 Laser

Available options increasing flexibility:

- Loading/unloading tables with dual pallet
- CCD camera with printing mark recognition
- 3D kit for cutting of 3D surfaces
- Fume exhaust fan (pump) & filtration

Model Mercury Fiber 1530

Working Area	Width:	1500
	Length:	3080
Overall	Width:	2746
	Length:	5009
	Height:	2071

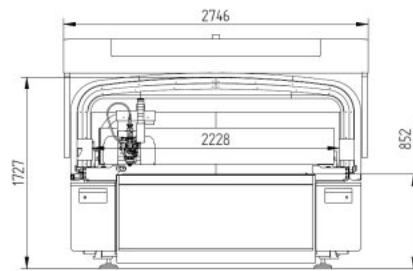

Kg 3100

The product is CE marked.
Features and system requirements may change without notice.

